



RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner INDEX Section 21 Township 11 North, Range 2E

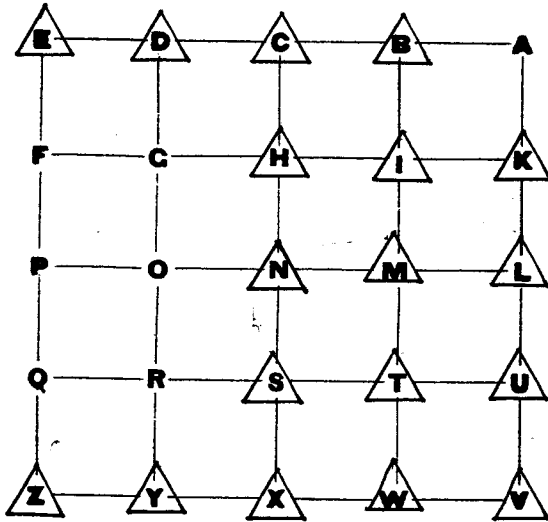

RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "B" Section 21 Township 11 North, Range 2 East

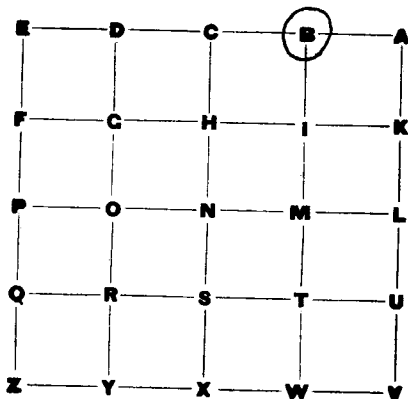


October 4, 1988

Field Crew - Rick Tapp, Robert E. Burdine, & Greg Randolph


(Pt #18) [Found] - Flat, rectangular red granite stone in southern root system of Persimmon Tree. Stone measures 6"x6" across top, is deeply embedded in the tree roots, & has a $\frac{3}{8}$ " Drill Hole in it's Top. It is $1\frac{1}{2}$ " S.E. of Wood Corner Post which is in the intersection of a North-South, & West Bound Fence line. Stone also has a piece of Sandstone Stone as a coverstone on top of it.

Reginald McCracker Morgan County Surveyor 10-4-88



RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "C" Section 21 Township 11 North, Range 2 East

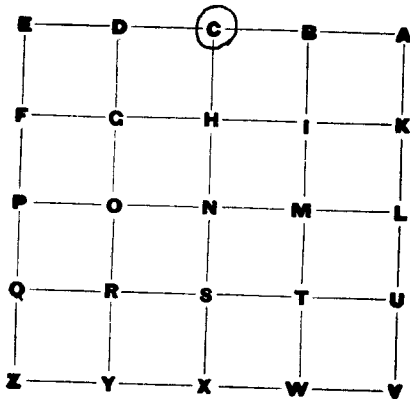

October 4, 1988

Field Crew - Rick Tapp, Robert E. Kurdine, & Greg Randalph


(Pt # 22) is the Computed "C" Stone Corner which falls in Oliver Creek & was not set
Due to severe erosion problems of particular area.

(Pt # 13) Set Type "A" Concrete Reference Monument to designate Computed "C" Corner - $S 11^{\circ} 12' 36'' W - 72.44'$

(Pt # 14) Set Type "A" Concrete Reference Monument to designate Computed "C" Corner - $N 78^{\circ} 56' 08'' E - 52.73'$


Note: All Bearings and Distances are from Computed "C" to References & are Astronomical

Reginald M. Craker Morgan County Surveyor 10-4-88



RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "D" Section 21 Township 11 North, Range 2 East

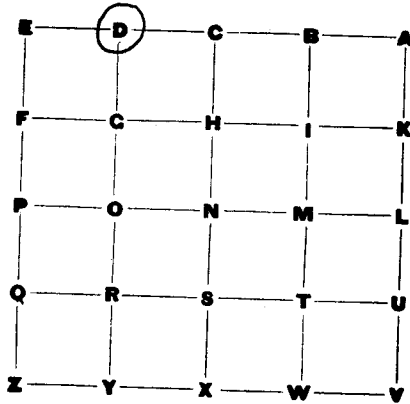


October 4, 1988

Field Crew - Rick Tapp, Robert E. Burdine, & Greg Randolph


(Pt #65) Set Type "A" Concrete Monument for "D" Corner, stone was not found. Stone ^{is} ~~was~~ located approximately 50' over the East Bank of Highway 252 and approximately 20' west of North-South Fenceline. Stone is 8" above Ground Surface.

Reginald M. Cracker Morgan County Surveyor 10-4-88



RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "E" Section 21 Township 11 North, Range 2 East

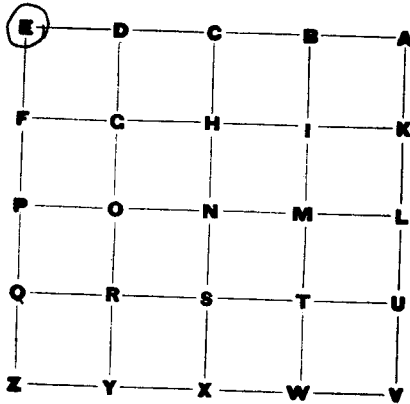

October 4, 1988

Field Crew - Rick Tapp, Robert E. Burdine, & Greg Randolph

(Pt #64) Set Type "A" Concrete Monument for "E" Corner, Stone was Not Found. Stone is Located 3' South and 4' East of Wood Headpost which is in the intersection of an North-South & East Bound Fenceline. Stone is Approximately 8" Above Ground Surface.


Reginald M. Cracken Morgan County Surveyor 10-4-88

Also refer to:

Point #77 File Name Mud Disk #3


Point #1 File Name Higgins Disk #4

SG 6.19.94



RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "H" Section 21 Township 11 North, Range 2 East

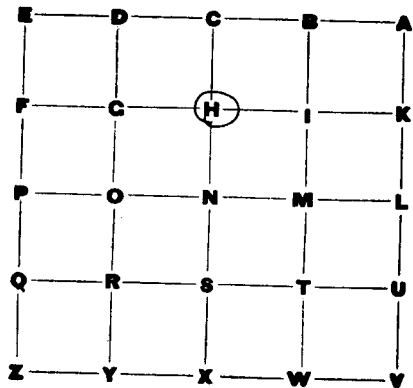


January 11, 1994

Field crew: Richard Tapp & Michael Sheppard

(point #126) Found Iron Spike, per Ross Holloway's references.
Approximate C/L SR 252 at road surface.




	Reference	Bearing	Distance
(#477)	1. "I" S21 T11 N R2 E (Set)	N 89° 59' 40" E	1340.3'
(#123)	2. "N" S21 T11 N R2 E (Found)	S 00° 18' 26" E	1371.31'

Reginald M. Cracker Morgan County Surveyor July 7, 1994



RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "I" Section 21 Township 11 North, Range 2 East

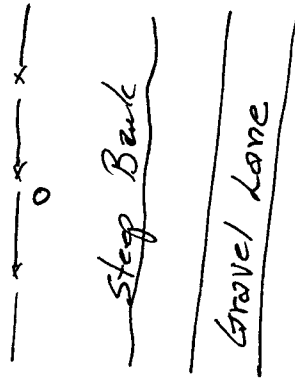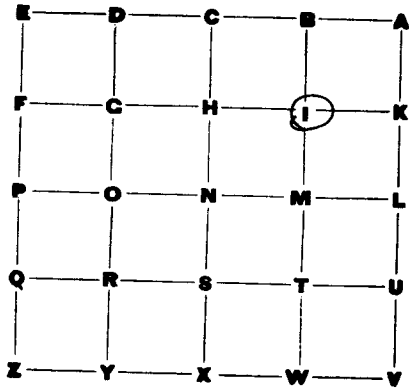

January 13, 1994

Field crew: Richard Tapp & Michael Sheppard


(pt #477) Set 3/4" black iron pipe which is 3' long and above ground surface by 4".

Reference	Bearing	Distance
(pt #476) 1. "M" S21 T11N R2E (set)	500°22'42" W	1383.13'
(pt #30) 2. "K" S21 T11N R2E (Found)	N89°59'38" E	1326.67'
(pt #126) 3. "H" S21 T11N R2E (Found)	S89°59'40" W	1340.3'
(pt #227) 4. "B" S21 T11N R2E (Found)	N00°22'45" E	1334.32'

Reginald McCracken Morgan County Surveyor July 7, 1994

RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "K" Section 21 Township 11 North, Range 2 East

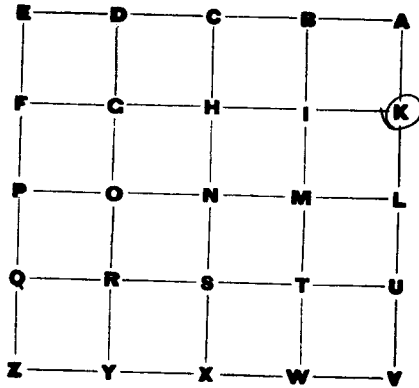

January 10, 1994


Field crew: Richard Tapp & Michael Sheppard

(pt # 30) Found 4" x 4" limestone, flush with ground surface. Highest point on NE corner of stone was used. There were 2 1/2" rebar on North side of stone.

Reference


	Reference	Bearing	Distance
(pt # 34)	1. "A" S21 T11N R2E (Found)	N 00° 35' 16" E	1334.83'
(pt # 218)	2. "L" SPS21 T11N R2E (Set)	S 00° 29' 40" W	1395.02'

Reginald Mc Craeker Morgan County Surveyor July 7, 1994



RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "L" Section 21 Township 11 North, Range 2 East

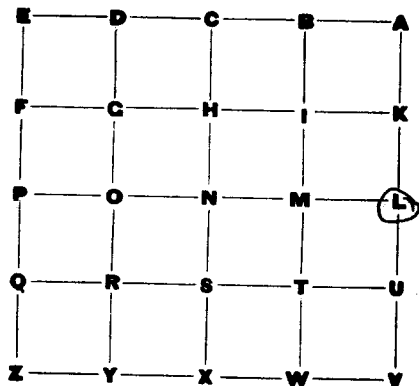

January 13, 1994


Field crew: Richard Tapp & Michael Sheppard

(pt #218) Set 5"x5" limestone monument with brass cap, 3" above ground surface. Rebar set by Ross Holloway is beside stone.

Note: New monument was set in place of small, loose stone found.




Reference	Bearing	Distance
(pt #476) 1. "M" S21T11N R2E	N89°29'33" W	1323.82'
(pt #480) 2. "U" S22T11N R2E	S00°00'13" E	1376.02'
(pt #30) 3. "K" S22T11N R2E	N00°29'40" E	1395.02'

Registered M^cCracken Morgan County Surveyor July 7, 1994



RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "M" Section 21 Township 11 North, Range 2 East

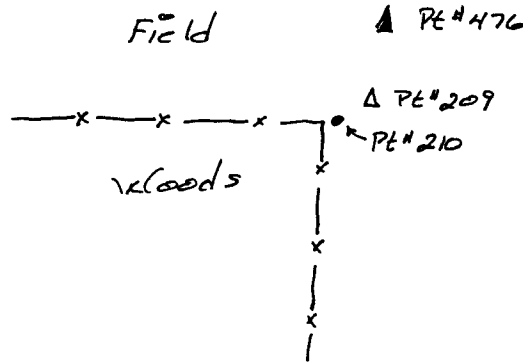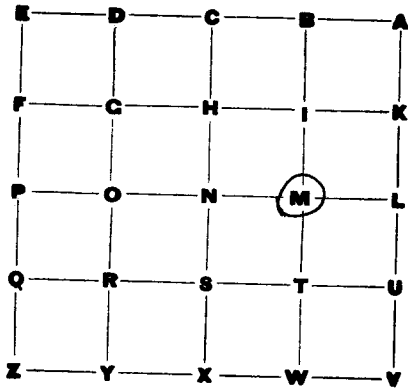

January 13, 1994

Field crew: Richard Tapp & Michael Sheppard



(pt #476) Set 5"x5" limestone monument with brass cap, 6" above ground ~~sets~~ surface.

Reference	Bearing	Distance
(pt #123) 1. "N" S21 T11 N R2E (Found)	N 89° 29' 40" W	1323.87'
(pt #218) 2. "L" S21 T11 N R2E (Set)	S 89° 29' 33" E	1323.82'
(pt #477) 3. "I" S21 T11 N R2E (Set)	N 00° 22' 48" E	1383.13'
(pt #131) 4. "T" S21 T11 N R2E (Found)	S 00° 18' 44" W	1366.06'
(pt #209) 5. Stone found (Not accepted)	S 21° W	20'
(pt #210) 6. Rebar found (Not accepted)	S 27° W	22'

Reginald McCracken Morgan County Surveyor July 7, 1994

RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "N" Section 21 Township 11 North, Range 2 East

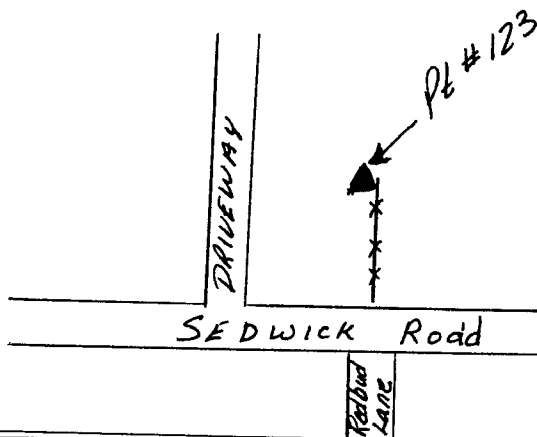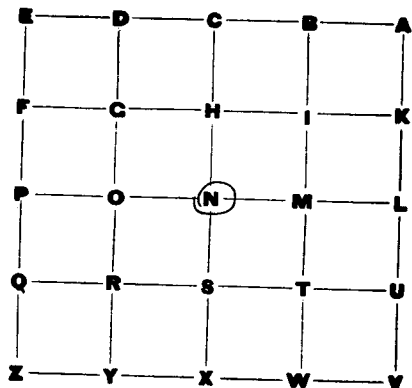


January 11, 1994

Field crew: Richard Tapp & Michael Sheppard

(point # 123) Found 4" x 8" cone shaped gray granite, 5" above ground surface with 1/2" rebar on West side of stone.


Reference	Bearing	Distance
(pt # 476) 1. "M" S21 T11N R2E (Set)	S89° 29' 40" E	1323.87'
(pt # 128) 2. "S" S21 T11N R2E (Found)	S00° 10' 15" E	1356.51'
(pt # 126) 3. "H" S21 T11N R2E (Found)	N00° 18' 26" W	1371.31'

Ronald M. Becker Morgan County Surveyor July 7, 1994



RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "S" Section 21 Township 11 North, Range 2 East

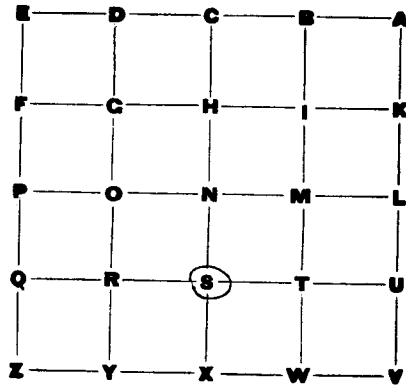


January 11, 1994

Field crew: Richard Tapp & Michael Sheppard

(point #128) Found 5"x5" cut limestone, 8" above ground and leaning to the West. Shot was taken on E side of stone. Stone is leaning against 8" ϕ elm. Tree should straighten the stone as it grows.


Reference	Bearing	Distance
(pt #123) 1. "N" S21 T11N R2E (Found)	N00°10'15" W	1356.51'
(pt #131) 2. "T" S21 T11N R2E (Found)	S89°04'26" E	1312.5'
(pt #493) 3. "X" S21 T11N R2E (set)	S00°10'12" E	1364.95'

Reginald M. Cracken Morgan County Surveyor July 7, 1994



RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "T" Section 21 Township 11 North, Range 2 East

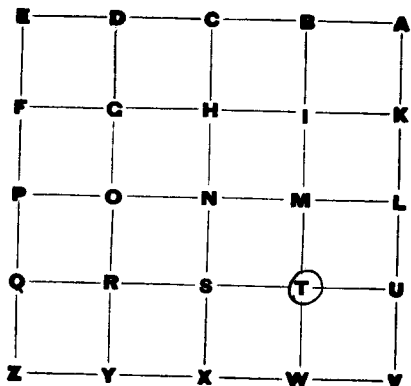

January 13, 1994

Field crew: Richard Tapp & Michael Sheppard

(point # 131) Found cone shaped gray granite, 6" above ground. Original 1952' references are still in place. Stone is in root of walnut tree.


Reference	Bearing	Distance
(pt # 128) 1. "S" S21 T11 N R2 E (Found)	N 89° 04' 26" W	1312.5'
(pt # 480) 2. "U" S21 T11 N R2 E (Set)	S 89° 03' 56" E	1313.48'
(pt # 476) 3. "M" S21 T11 N R2 E (Set)	N 00° 18' 44" E	1316.06'
(pt # 482) 4. "W" S21 T11 N R2 E (Set)	S 00° 30' 09" E	1371.01'

Reginald M. Cracker Morgan County Surveyor July 7, 1994



RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "U" Section 21 Township 11 North, Range 2 East

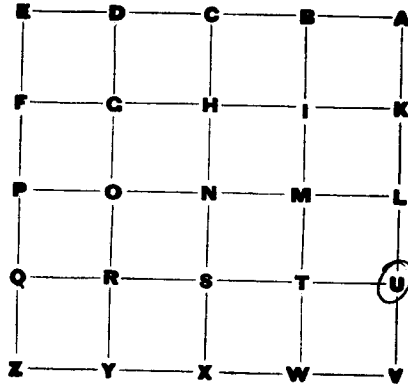


January 13, 1994

Field Crew: Richard Tapp & Michael Sheppard

(Point # 480) Set copper weld rod at road surface in E of Whetstone Road.



Reference	Bearing	Distance
(pt #490) 1. "V" S21 T11N R2E (set)	S00°02'24"E	1376.56'
(pt #131) 2. "T" S21 T11N R2E (found)	N89°03'56"W	1331.48'
(pt #169) 3. iron pin (found)	N01°E	16.18'
(pt #170) 4. railroad spike (found)	S00°E	19.54'
(pt #475) 5. "L" S21 T11N R2E (set)	N00°01'37"W	1376.18'

Reginald M. Craker Morgan County Surveyor July 22, 1994



RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "V" Section 21 Township 11 North, Range 2 East

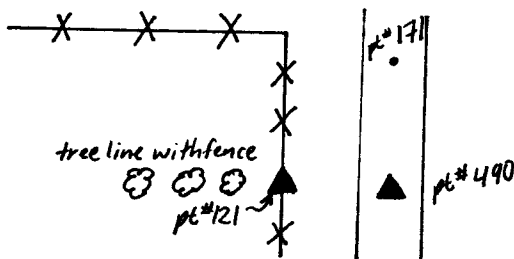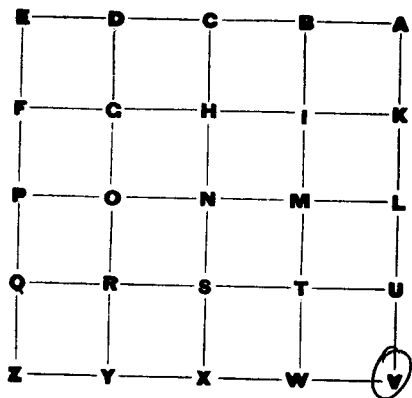


January 11, 1994

Field Crew: Richard Tapp; Michael Sheppard

(Point #490) Set 30" long copper weld rod in $\frac{1}{2}$ of Whetstone Road, even with road surface.

Reference	Bearing	Distance
(pt #121) 1. iron pipe in concrete (found)	N88°44'10"W	17.54'
(pt #481) 2. "W" S21 T11N R2E (set)	N88°48'52"W	1320.52'
(pt #171) 3. railroad spike (found)	N00°01'13"W	38.51'





A cut limestone monument with engraved "W" was found in the mid 1970s in an existing fence/tree line, but subsequently was bulldozed out. A concrete monument was set (point #121) at the same location as the limestone monument found. At that time I believed the limestone monument (point #121) was the location of the "V" stone. However, now given survey data representing one mile in each of the four cardinal directions, I have set a new monument for this corner.

Reginald M. Clesker Morgan County Surveyor July 22, 1994

RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "W" Section 21 Township 11 North, Range 2 East

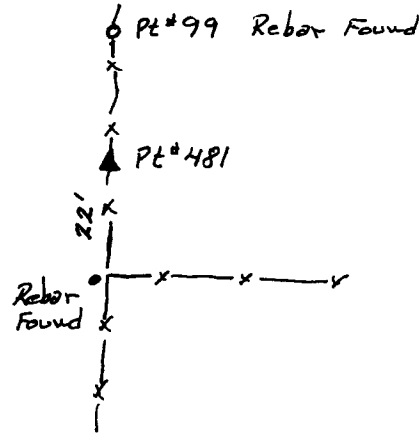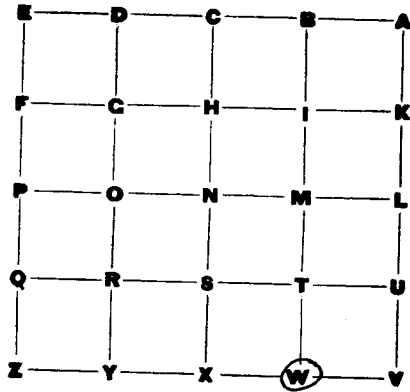


January 18, 1994

Field crew: Richard Tapp & Michael Sheppard

(point #481) Set 5'x5" limestone monument with brass cap.


	Reference	Bearing	Distance
(pt #490) 1.	"V" S21 T11 N R2E (Set)	S88° 48' 52" E	1320.52'
(pt #493) 2.	"X" S21 T11 N R2E (Set)	N88° 49' 07" W	1320.58'
(pt #99) 3.	5/8" Rebar Found, set by ROH	N00° 53' 49" W	22.68'

Reginald McCracken Morgan County Surveyor July 7, 1994



RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "X" Section 21 Township 11 North, Range 2 East

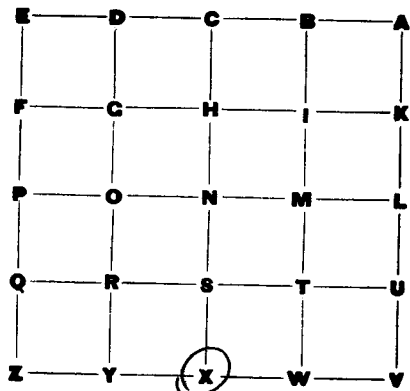


January 21, 1994

Field crew: Richard Tapp & Michael Sheppard

(pt #493) Set $3/4"$ ϕ black iron pipe which is 4' long. There is 6" of pipe left above ground surface. Original stone had been bulldozed out.



Reference	Bearing	Distance
(pt #481) 1. "W" S211N R2E (Set)	$588^{\circ}49'07" E$	1320.58'
(pt #492) 2. "Y" S211N R2E (Set)	$N88^{\circ}37'46" W$	1339.68'
(pt #428) 3. "S" S211N R2E (Found)	$N00^{\circ}10'12" W$	1364.95'

Reginald W. Cracker Morgan County Surveyor July 7, 1994



RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "Y" Section 21 Township 11 North, Range 2 East

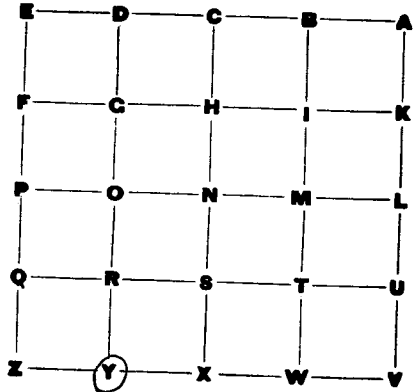

January 13, 1993

Field crew: Richard Tapp & Michael Sheppard



(pt # ~~181~~⁴⁹²) Set 5x5" limestone monument with brass cap. Stone is 6" above ground surface.

	Reference	Dia.	Bearing	Distance
(pt #183) 1.	Hickory	1'	N 87° E	13.3'
(pt #184) 2.	Poplar	28"	N 79° E	22.8'
(pt #164) 3.	"Z" S21T11N R2E		N 88° 37' 57" W	1339.69'
(pt #493) 4.	"X" S21T11N R2E		S 88° 37' 46" E	1339.68'
(pt #178) 5.	Wood Corner Post		N 75° 57' 38" E	13.65'

Reginald McCracken Morgan County Surveyor July 7, 1994

RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "Z" Section 21 Township 11 North, Range 2 East

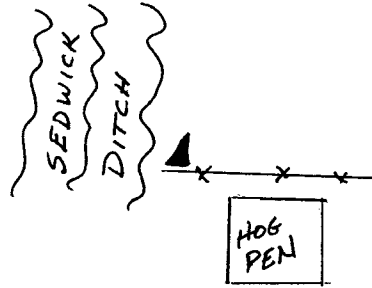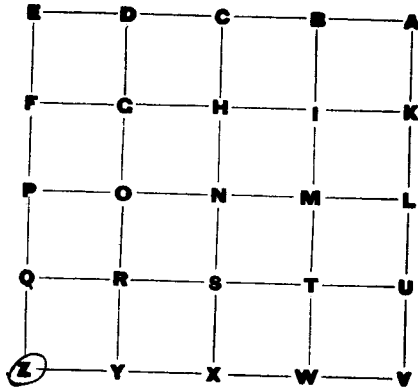

July 8, 1994

Field crew: Richard Tapp, Michael Sheppard & Sarah Gray

(point #164) Found a 3/4" black iron pipe that is 4.7' long for the "Z". Pipe is located on the East side of creek. (Sedwick Ditch)

Reginald W. Cracker Morgan County Surveyor July 22, 1994

