


RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "B" Section 22 Township 11 North, Range 2 East

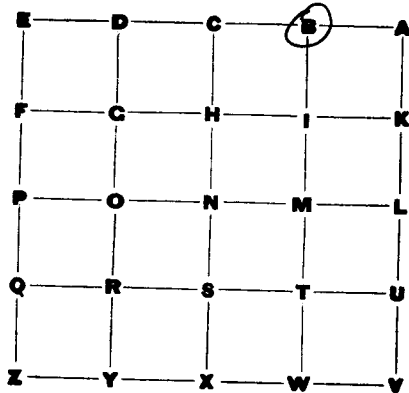


January 10, 1994
Field Crew: Richard Tapp & Michael Sheppard

(pt. #50) Found Railroad spike in E of Conservation Club Road
Set by Reginald McCracken Morgan County Surveyor


	Reference	Bearing	Distance
(pt. #497)	1. "C" S22TUNR2E (Set)	N89°54'35"W	1308.43'
(pt. #112)	2. "A" S22TUNR2E (Found)	S89°55'42"E	1308.54'
(pt. #495)	3. "M" S22TUNR2E (Set)	S00°04'20"W	2204.83'

Reginald McCracken Morgan County Surveyor July 7, 1994



RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "C" Section 22 Township 11 North, Range 2 East

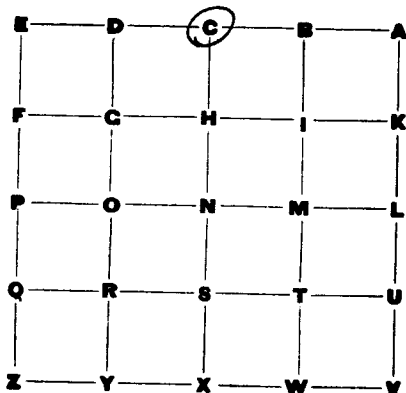


December 9, 1993

Field crew: Richard Tapp & Michael Sheppard

(point #497) Set 5"x5" limestone ~~marker~~ monument with brass cap.
Monument is 8" above ground surface and
approximately 20' East of field. Refer to "X" 515



Reference	Bearing	Distance
(pt #50) 1. "B" S22 T11 N R2 E (Fd)	S 89° 54' 35" E	1308.43'
(pt #71) 2. "N" S22 T11 N R2 E (Fd)	S 00° 02' 10" W	2705.95'
(pt #496) 3. "D" S22 T11 N R2 E (set)	N 89° 54' 33" W	1308.41'

Reginald M. Cracker Morgan County Surveyor July 7, 1994



RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "D" Section 22 Township 11 North, Range 2 East

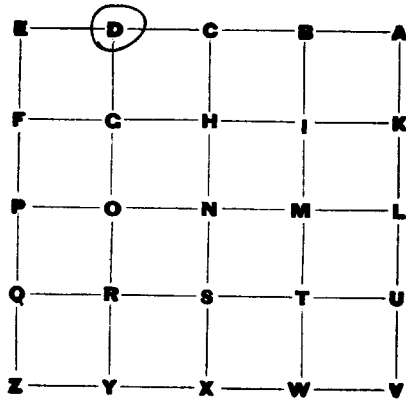

December 9, 1993

Field crew: Richard Tapp & Michael Sheppard


(point #496) Set 5"x5" limestone monument with brass cap, in place of old stone which was found but loose. Monument is 1' above ground.

	Reference	Dia	Bearing	Distance
(pt. #43)	1. 5/8" Rebar found		S 68° 09' 48" E	2.65'
(pt. #156)	2. Maple	8"	S 36° W	9.7'
(pt. #157)	3. Poplar	14"	N 04° E	12.6'
(pt. #158)	4. Poplar	24"	S 83° E	24'
(pt. #497)	5. "C" S22 T11N R2E (Set)		S 89° 54' 33" E	1308.41'
(pt. #34)	6. "E" S22 T11N R2E (Found)		N 89° 54' 34" W	1308.42'

Reginald Wocracke Morgan County Surveyor July 7, 1994

RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner E Section 22 Township 11 North, Range 2 East
A 21 11 2 EAST

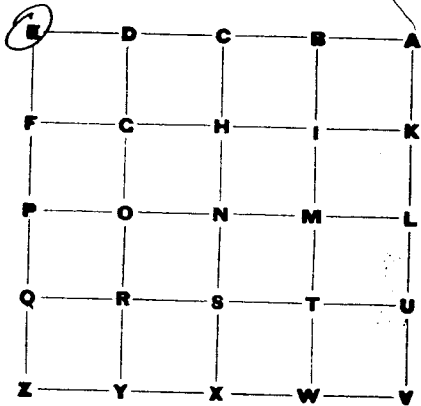

January 10, 1994

Field Crew: Richard Tapp & Michael Sheppard

(point #34) Found oval shaped sandstone on side of hill. Stone is 1.5"x2" and is approximately 2" above ground surface. Placed 3/8" drill hole in top of stone. There is a 3/4" iron pipe beside the stone.


	Reference	Bearing	Distance
(pt #496)	1. "D" S22T11R2E (Set)	S89°54'34"E	1308.42'
(pt #227)	2. "B" S21T11R2E (Found)	S89°58'26"W	1331.53'
(pt #30)	3. "F" S22T11R2E (Found)	S00°35'16"W	1334.83'

Reginald Mt Creek Morgan County Surveys July 7, 1994



RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "F" Section 22 Township 11 North, Range 2 East

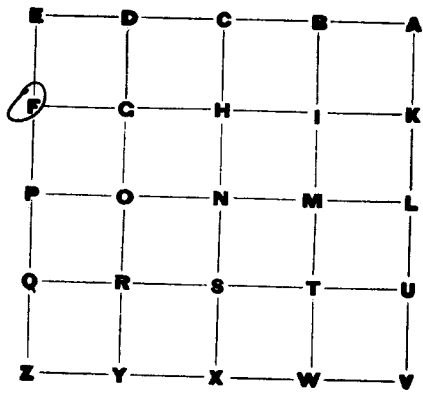


January 10, 1994

Field Crew: Richard Tapp & Michael Sheppard

(pt. #30) Found 4"x4" limestone, flush with ground surface. Highest point on NE corner of stone was used. There were 2 1/2" rebars on North side of stone.


	Reference	Bearing	Distance
(pt. #34)	1. "E" S22T11N R2E (Found)	N00°35'16"E	1337.83'
(pt. #218)	2. "P" S22T11N R2E (Set)	S00°29'40"W	1395.02'

Reginald W. Becken Morgan County Surveyor July 7, 1994



RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.


Corner "M" Section 22 Township 11 North, Range 2 East

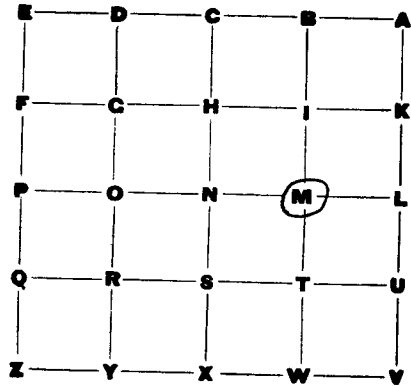

January 21, 1994

Field crew: Richard Tapp & Michael Sheppard

(pt #495) Set 1" bar which is 20" long driven flush with road surface (Conservation Club Road).




Reference	Bearing	Distance
(pt #159) 1. Found cone shaped stone (not accepted)	N 89° 08' 36" E	10.4'
(pt #48) 2. "L" S 22 T 11 N R 2 E (Fd)	589° 54' 19" E	1305.08'
(pt #71) 3. "N" S 22 T 11 N R 2 E (Fd)	N 89° 57' 32" W	1306.72'

Reginald Mth Cracken Morgan County Surveyor July 7, 1994

RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "N" Section 22 Township 11 North, Range 2 East

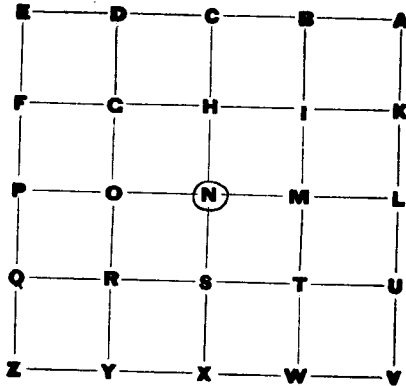

January 11, 1994
Field crew: Richard Tapp & Michael Sheppard

(pt #71) Found 6"x8" round brown granite, 3" above ground surface and
(pt #500) 1.5' North of Head post with fence running South & West.


Reference	Bearing	Distance
(pt #495) 1. "M" S22T11N R2E (Set)	S 89° 54' 06" E	1305.05'
(pt #496) 2. "O" S22T11N R2E (Set)	S 89° 34' 19" W	1320.51'
(pt #497) 3. "C" S22T11N R2E (Set)	N 00° 00' 02" E	2704.65'
(pt #484) 4. "S" S22T11N R2E (Set)	S 00° 18' 29" W	1368'

Reginald McCracken Morgan County Surveyor July 7, 1994



RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "O" Section 22 Township 11 North, Range 2 East

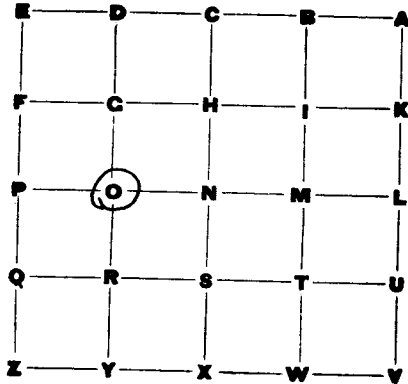


January 13, 1994

Field crew: Richard Tapp & Michael Sheppard

(point #479) Set railroad spike in root of 12" maple.
Ref Mon is a limestone w/ brass cap



Reference	Bearing	Distance
(pt#478) 1. Ref. monument "O" S22T11N R2E (Set)	N 14° 18' 50" W	8.1'
(pt#218) 2. "P" S22T11N R2E (Set)	S 89° 34' 34" W	1320.42'
(pt#71) 3. "N" S22T11N R2E (Found)	N 89° 34' 19" E	1320.51'
(pt#195) 4. "R" S22T11N R2E (Set)	S 00° 06' 59" W	1372.34'

Reginald M. Cracker Morgan County Surveyor July 7, 1994



RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "P" Section 22 Township 11 North, Range 2 East

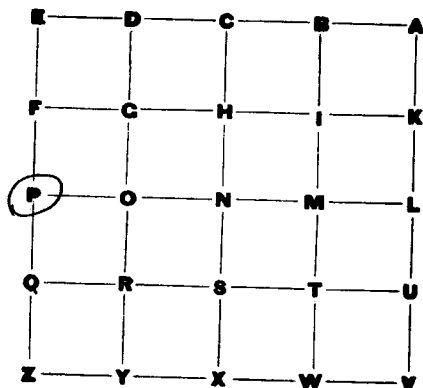

January 13, 1994

Field crew: Richard Tapp & Michael Sheppard

(point #818) Set 5"x5" limestone monument with brass cap, 3" above ground surface. Rebar set by Ross Holloway is beside stone.



Note: New monument was set in place of small, loose stone found.

Reference	Bearing	Distance
(pt #478) 1. "O" S22 T11N R2E	N89° 34' 34" E	1320.42'
(pt #486) 2. "Q" S22 T11N R2E	S 00° 02' 16" E	1376.18'
(pt #30) 3. "F" S22 T11N R2E	N00° 29' 40" E	1395.02'

Reginald Mocracker Morgan County Surveyor July 7, 1994

RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner Q Section 22 Township 11 North, Range 2 East

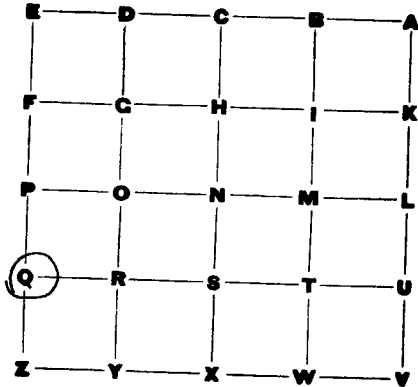



January 13, 1994
 Field crew: Richard Tapp & Michael Sheppard
 (pt #486) Set copper weld rod at road surface in 1/4 Whetstone Rd.

#	Reference	Bearing	Distance
(pt #483)	1. "R" S22 T11N R2E (set)	N 89° 24' 27" E	1316.76'
(pt #218)	2. "P" S22 T11N R2E (set)	N 00° 02' 16" W	1376.18'
(pt #490)	3. "Z" S22 T11N R2E (set)	S 00° 03' 00" E	1376.56'
pt #23	4. Iron Pin Found	N 01° 13' 06" E	16.18'
pt #24	5. Railroad Spike Found	S 00° 21' 50" E	19.54'

Reginald McCracken, Morgan County Surveyor July 7, 1994

RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "R" Section 22 Township 11 North, Range 2 East

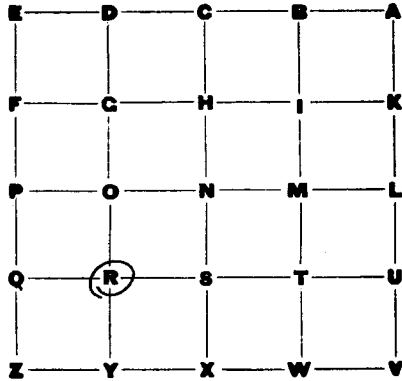

January 18, 1994
Field crew: Richard Tapp & Michael Sheppard.



(point #483) Set iron bar in roots of 24" Spignut Hickory.

	Reference	Dia	Bearing	Distance
(pt #224)	1. White Oak	14"	S 88° W	13.2'
(pt #484)	2. "S" S22 T11N R2E (Set)		N 89° 22' 52" E	1315.98'
(pt #486)	3. "Q" S22 T11N R2E (Set)		S 89° 24' 27" W	1316.76'
(pt #489)	4. "Y" S22 T11N R2E (Set)		S 00° 08' 43" W	1371.97'
(pt #479)	5. "O" S22 T11N R2E (Set)		N 00° 06' 59" E	1372.34'
(pt #190)	6. Headpost with Rebar Beside		N 71° W	12.1'

Reginald M. Cracker Morgan County Surveyor July 7, 1994

RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "S" Section 22 Township 11 North, Range 2 East

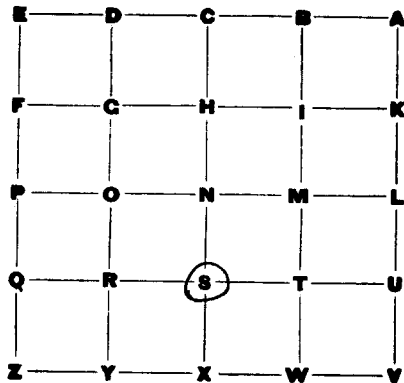

January 21, 1994
Field Crew: Richard Tapp & Michael Sheppard


(pt #484) Set 5"x5" limestone monument with brass cap.
Stone is 3" below ground surface with 1" rebar on
East side of monument.

	Reference	Dia.	Bearing	Distance
(pt #221)	1. Maple	14"	S 43° E	10.3'
(pt #222)	2. Apple	14"	S 75° E	37.7'
(pt #483)	3. "R" S22 T11 N R2 E (Set)		S 89° 22' 52" W	1315.98'
(pt #488)	4. "X" S22 T11 N R2 E (Set)		S 00° 18' 36" W	1367.99'
(pt #71)	5. "N" S22 T11 N R2 E (Fd)		N 00° 18' 29" E	1368'

Reginald McCracken Morgan County Surveyor July 7, 1994

RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "U" Section 22 Township 11 North, Range 2 East

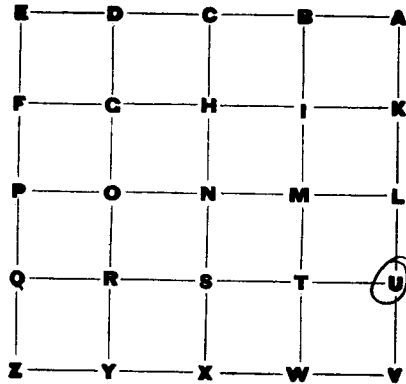


January 21, 1994

Field Crew: Richard Tapp & Michael Sheppard

(Point # 494) Since the computed location of "U" fell in a small lake,
a 5" x 5" limestone reference monument was set. (see below)


Reference	Bearing	Distance
(pt # 296) 1. ref. mon. "U" S22 T11N R2E (set)	S00° 00' 00" W	50.00'
(pt # 148) 2. "L" S22 T11N R2E (found)	N01° 06' 00" W	1347.15'
(pt # 61) 3. "V" S22 T11N R2E (stone)	S00° 06' 00" W	1347.14'

Ronald McCracken Morgan County Surveyor July 22, 1994



RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "V" Section 22 Township 11 North, Range 2 East

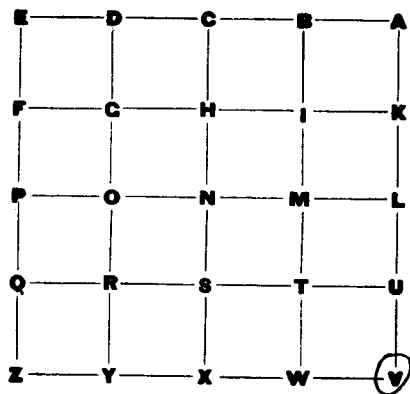


January 10, 1994

Field Crew: Richard Tapp & Michael Sheppard

(Point #402) Found auto axle for stone. Auto axle is approximately 4" above ground surface and west of drainage ditch. Refer to old stone record book.


Reference	Bearing	Distance
(pt #487) 1. "W" S22T11N R2E (set)	S89°12'20"W	1312.13'

Reginald M. Cracker Morgan County Surveyor July 22, 1994



RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "W" Section 22 Township 11 North, Range 2 East

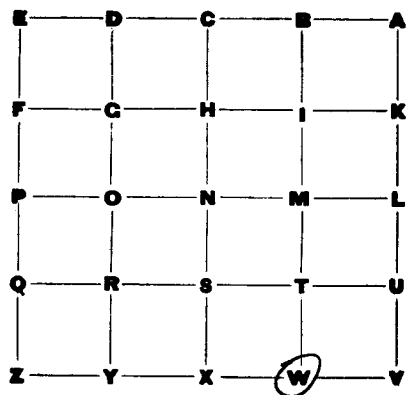


January 10, 1994

Field Crew: Richard Tappi & Michael Sheppard

(pt[#] 497) Set 5"x5" limestone monument with brass cap which is 3" above ground surface.


	Reference	Dia.	Bearing	Distance
(pt [#] 60)	1. Stone found but not accepted (ie Iron Pipe in concrete)		N49°12'05"W	2.58'
(pt [#] 223)	2. Oak	28"	N24°36'11"W	8.23'
(pt [#] 498)	3. "X" 522 JUN R2E (Set)		S89°12'12"W	1312.13'
(pt [#] 402)	4. "V" 522 JUN R2E (Found)		N89°12'20"E	1312.13'
(pt [#] 495)	5. "M" 522 JUN R2E (Set)		N00°11'59"E	2716.02'

Reginald McCracken Morgan County Surveyor July 7, 1994



RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "X" Section 22 Township 11 North, Range 2 East

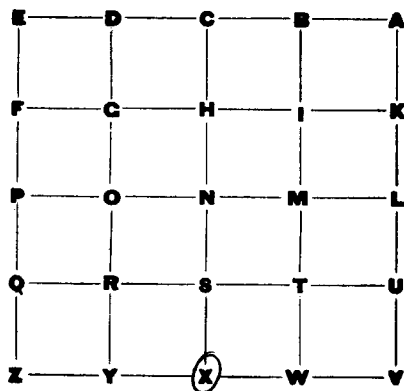


January 10, 1994

Field Crew: Richard Tapp & Michael Sheppard

(Point #488) Set 1" \emptyset iron rod 3' long, 3" above ground, and on south side of creek bank.


Reference	Bearing	Distance
(pt #68) 1. $\frac{3}{4}$ " iron pipe in concrete	S89°35'27" W	25.32'
(pt #69) 2. $\frac{3}{4}$ " iron pipe in concrete	N87°21'14" W	8.78'
(pt #487) 3. "W" S22 T11N R2E (set)	N89°12'17" E	1312.13'
(pt #484) 4. "S" S22 T11N R2E (set)	N00°18'36" E	1367.99'
(pt #489) 5. "Y" S22 T11N R2E (set)	S89°12'18" W	1312.11'

Reginald M. Proctor Morgan County Surveyor July 22, 1994



RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "Y" Section 22 Township 11 North, Range 2E05E

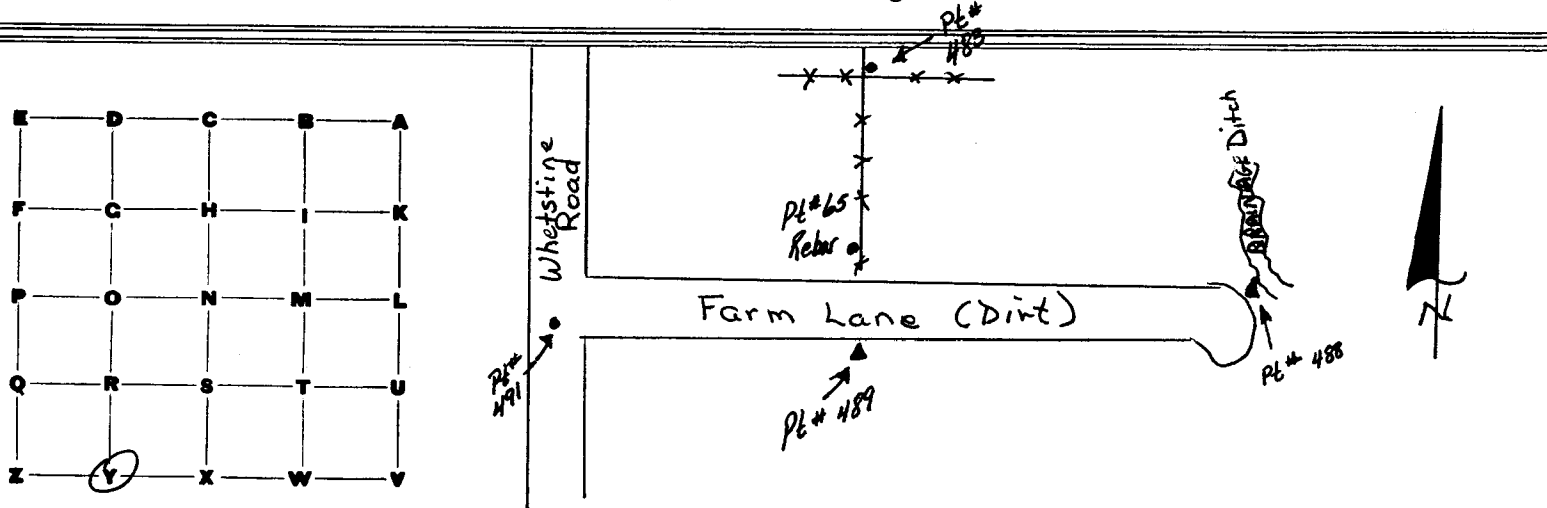


January 10, 1994
Field Crew: Richard Tapp & Michael Sheppard

(pt # 489) Set 5"x5" limestone monument with brass cap, 2" above ground surface.




Reference	Bearing	Distance
(pt # 65) 1. 5/8" rebar found	N10°51'06"W	26.2'
(pt # 483) 2. "R" 522 TURN R2E (set)	N00°08'43"E	1321.97'
(pt # 482) 3. "X" 522 TURN R2E (set)	N79°12'18"E	1312.11'
(pt # 491) 4. "Z" 522 TURN R2E (set)	S89°12'16"W	1312.12'

Reginald M. Craker Morgan County Surveyor July 22, 1994



RECORD OF SURVEYS IN MORGAN COUNTY, INDIANA.

Corner "Z" Section 22 Township 11 North, Range 2 East

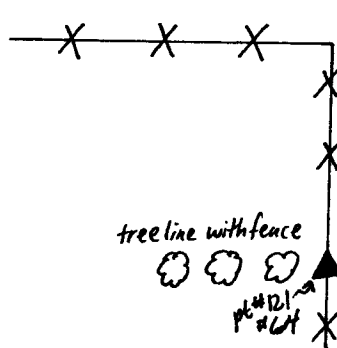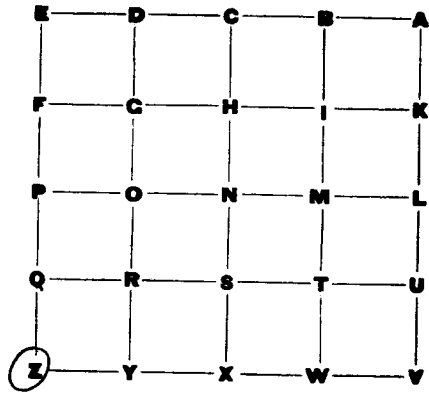


January 10, 1994

Field crew: Richard Tapp & Michael Sheppard

(Point #490) Set 30" long copper weld rod in E of Whetstone Road, even with road surface.

Reference	Bearing	Distance
pt # 64 1. Iron Pipe in Concrete (found)	N 88° 50' 38" W	17.55'
pt # 25 2. RR Spike Found	N 00° 01' 52" W	38.51'
pt # 489 3. "Y" Set S22 T1N R2E	N 89° 12' 16" E	1312.12'
pt # 486 4. "Q" Set S22 T1N R2E	N 00° 03' 03" W	1376.56'



A cut limestone monument with engraved "W" was found in the mid 1970s in an existing fence/tree line, but subsequently was bulldozed out. A concrete monument was set (point #121) at the same location as the limestone monument found. At that time, I believed the limestone monument (point #121) was the location of the "Z" stone. However, now given survey data representing one mile in each of the four cardinal directions, I have set a new monument for this corner.

Reginald M. Cracker Morgan County Surveyor July 22, 1994